



# P508



## User Manual

DELTA RADIO GROUP  
[www.deltaradiogroup.com](http://www.deltaradiogroup.com)

## NOTE

Before using the product, please read the Quick Guide to fully benefit from it.

This product involves constant upgrading and/or improvement, our company reserves the right to change the specifications of software and/or hardware mentioned in this operating guide without any prior notice. The product specifications and information mentioned in the operating guide are for reference only.

### Check List:

Please check the following accessories before you discard the packing material. Please contact your local dealer immediately if there is any missing or damage parts.

Accessories	Quality
P508	1
Battery	1
USB Data Cable	1
Power supply	1
Belt Clip	1
Belt Clip holder	1

## Overview of P508




No.	Part Name	No.	Part Name
1	Volume +	8	13 Pin Connector
2	PTT Button	9	USB Port
3	Volume -	10	Power
4	Mute	11	Charging Point
5	Menu	12	Speaker
6	Mic	13	Flash Light
7	Emergency Button	14	Cover Lock

## LED indicator Light

Operating state	Indication
Charging	Red (Steady)
Message Prompt	Blue (Steady)
More than 90% Charge capacity	Green (Steady)

## Installation of SIM card

- Anticlockwise the switch of battery cover 45°, open it and remove battery.
- Insert the SD card into the slot.
- Place the battery in the correct direction in the battery slot, and then close the battery cover by turning the battery cover switch clockwise 45° to lock the battery cover.

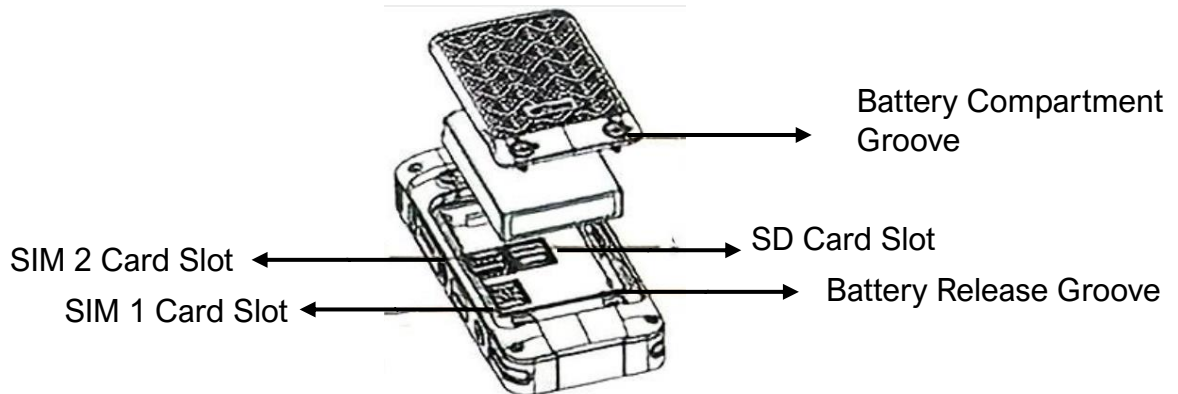

## Charging the Battery

- Using USB Data Cable

Connect the IP smart terminal and power adapter using the USB Data Cable.

Red light on the IP smart terminal indicates battery charging in progress.

Green light indicates fully charged.

### Important:

- **Use only the designated charger.**
- **Battery must be fully charged before first use.**
- **Do not expose the battery to high temperature.**
- **Do not dismantle the battery.**

## Basic operations

- **Start up**

Press the power on button for 3 seconds, Once the screen goes light up, You will see the "Logo", it indicates successful Startup.

- **Shut Down**

Press the power off button for 3 seconds, Popup window showing shutdown and restart, click on shutdown, Once the screen goes blank, the smart terminal is fully shut down.

- **Unlock**

Press ("=") O.K button and then Menu

- **Group Call (with a group selected)**

Press and hold the PTT button until you hear the Permit Tone.

You are now connected to the Group.

You may begin to talk.

Release PTT button to end the call and the device will be in the receiving mode.

- **Emergency Call**

Press and hold the Emergency button for 3 seconds can start.

- **Backlight**

Unlock the device.

Press/ hold "FN" button to on and off backlight. You can select the time duration of the backlight.

- **Low Batt**

When the battery power fall below 15%, a "beeping" tone will be heard.

# Troubleshooting

No	Problem	Solution
1	Silent, no response	<ul style="list-style-type: none"><li>• Battery might be drained, please replace the battery or charge it.</li><li>• Battery might not be installed correctly, please replace it with a fully charged battery or charge the battery.</li><li>• Check if the device has been power on.</li><li>• Check if the external audio accessory is connected.</li><li>• Check if the radio is Muted.</li><li>• Check all volume levels.</li><li>• Check the channel is not muted</li></ul>
2	Unable to Make/receive calls	<ul style="list-style-type: none"><li>• Check if you are in the same group.</li><li>• Check whether the network is connected.</li></ul>
3	Battery drained rapidly	<ul style="list-style-type: none"><li>• Shut down the Wi-Fi and GPS if not in use.</li></ul>
4	Cannot Charge	<ul style="list-style-type: none"><li>• Check USB cable, replace if faulty.</li></ul>



322 S Michigan Ave  
Lower Suite S344  
Chicago IL 60604-4434